


## Construction wheelbarrow

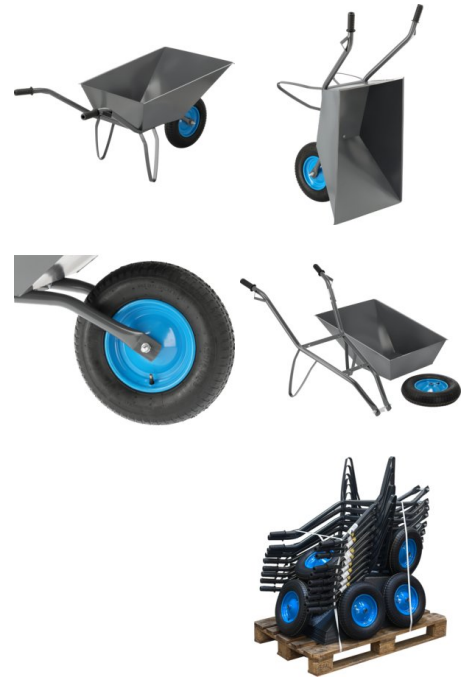

Heavy-duty construction wheelbarrows with welded bowl.

- payload: 130 kg
- capacity: 80 l
- weight: 13.7kg
- overall length: 1240 mm
- Overall width: 650 millimeters
- overall height: 660 mm
- colour: grey

bowl:

- material: welded and varnished sheet steel
- sheet thickness: 1.2 mm
- bowl length: 800 mm
- bowl width: 600 mm
- depth of bowl: 280 mm
- dimensions of the bottom of the bowl: 390x370 mm
- bowl fixing screws: M8x20 countersunk head, flat PZ4

wheel:

- pneumatic, inner tubes 4.00-8
- wheel diameter: 400 mm
- rim diameter: 220 mm
- fixing screw: M12x150 mm
- ball bearing 6001 (12x28x8 mm)

frame:


- material: lacquered steel tube
- tube diameter: 32 mm
- wall thickness: 1.5 mm

feet:

- material: lacquered flat steel bar
- width: 25 mm

- thickness: 4 mm
- wheelbarrow bottom height: 350 mm

The wheelbarrow is supplied in three parts for self-assembly by the user.

No.	Capacity [l]	Steel sheet thickness [mm]	
78690	80	1.2	10